

Truck-mounted knuckle-boom crane

Compact truck-mounted lifting for delivery fleets, service operations and material handling.



Proposed installation concept. Vehicle and fitment shown for illustration.

LIFTING MOMENT

5.3 tm

HYDRAULIC REACH

7.2 m

STANDARD WEIGHT

760 kg

Built for commercial vehicle applications

High-tensile steel construction and hydraulic telescopic reach support versatile material handling. Hydrolift equipment is presented through the Al Furat partnership for commercial vehicle and fleet applications.



Configuration and equipment

Safety/control packages are configuration dependent: Hx standard; HPS overload protection; HPro radio remote; HPro+ safety, remote control and intelligent monitoring. Specify the required package when ordering.

Manufacturer references and detailed specifications follow.

Load chart and lifting capacity

Manufacturer load envelope and linear chart, reproduced from the original brochure.

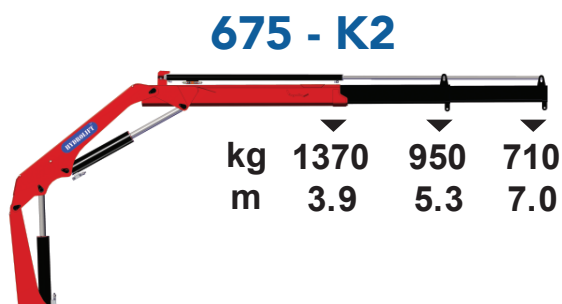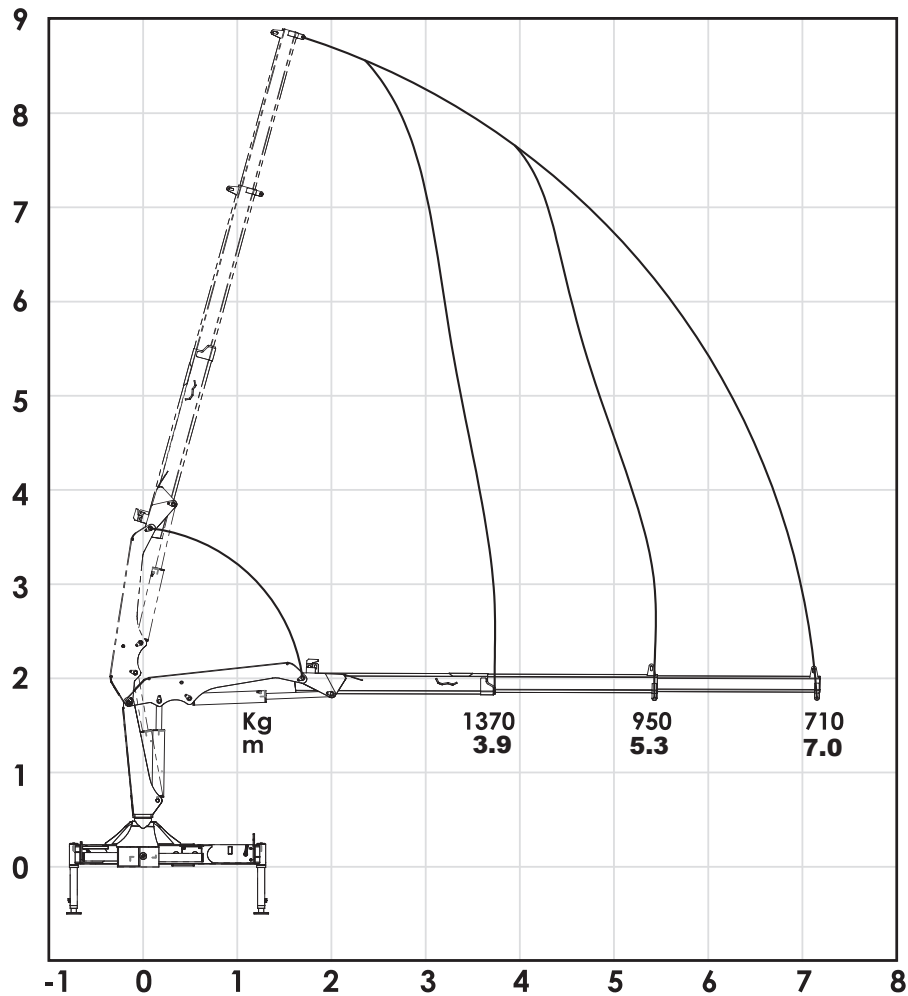

1,370 kg

at 3.9 m radius

950 kg

at 5.3 m radius


710 kg

at 7.0 m radius

Use the installed crane load chart for operation. Capacity applies at the stated radius and approved support configuration; listed points are not interpolated ratings.

Dimensions and installation envelope

Manufacturer family drawings. Dimensions in millimetres; enlarged references, not to scale.

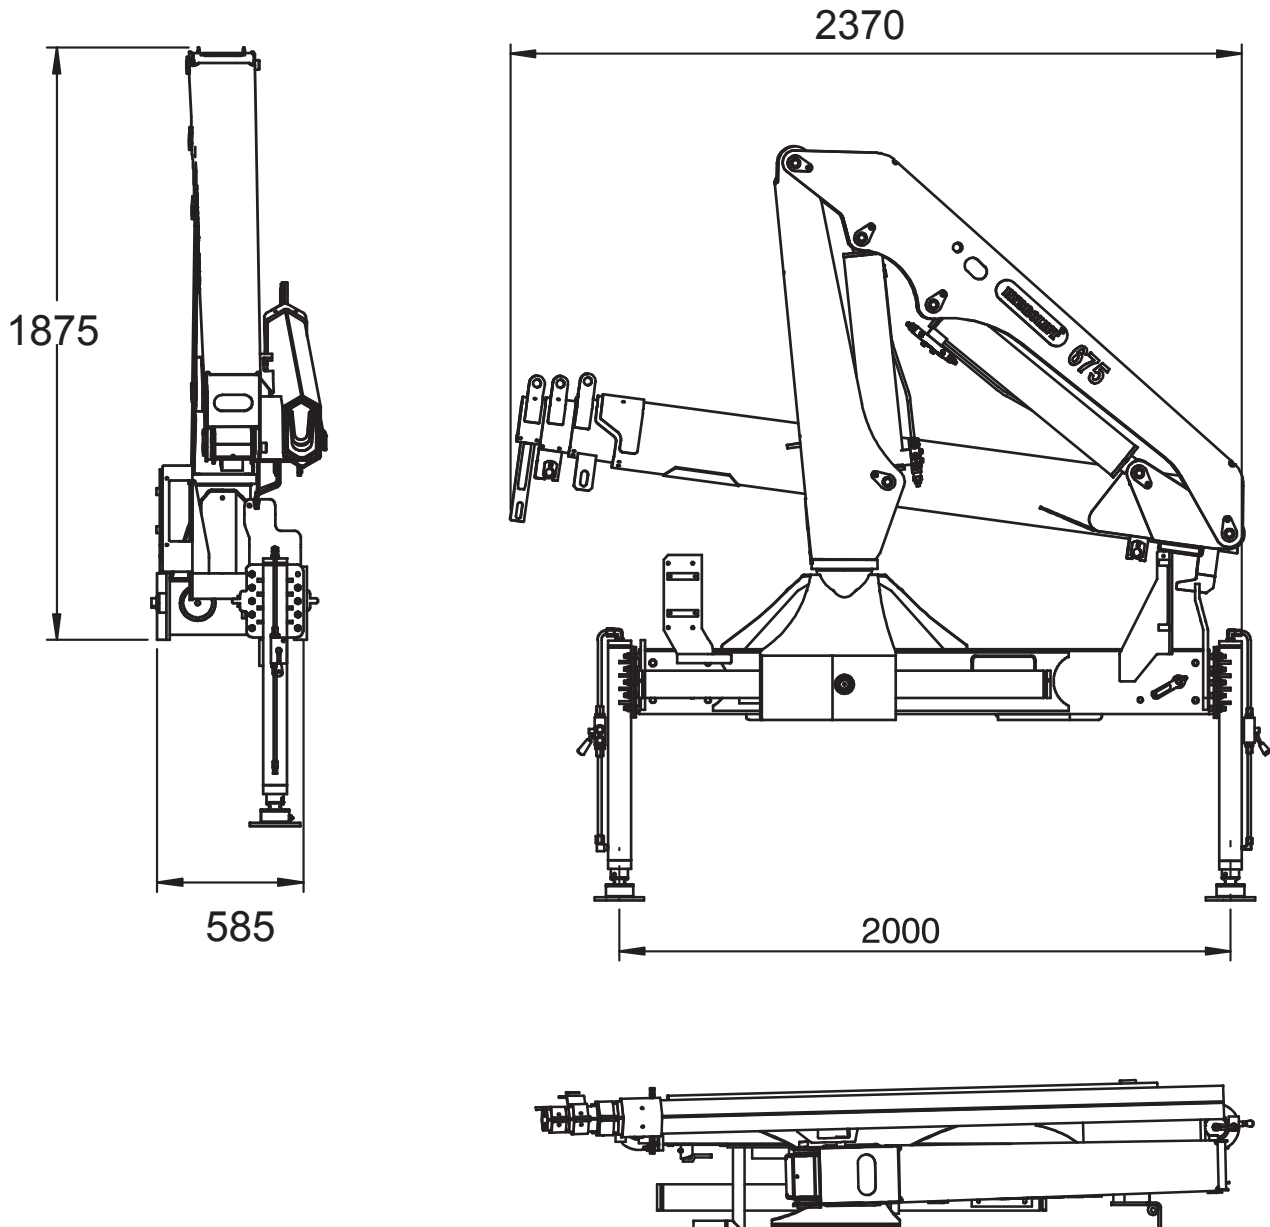

Source dimensions to confirm

The family drawing shows 2,370 mm folded length. The K2 specification table states 2,310 mm; 2,370 mm is the K3 table value. Confirm the K2 mounting drawing before installation.

Technical specifications

Variant-specific reference: Hydrolift 675-K2. Values follow the manufacturer specification table.

Specification	Unit	K2
Lifting moment	tm	5.3
Hydraulic reach	m	7.2
Lifting capacity at 3.9 m	kg	1,370
Lifting capacity at 5.3 m	kg	950
Lifting capacity at 7.0 m	kg	710
Slewing angle	deg	400
Slewing torque	kg-m	581
Folded height above chassis	mm	1,875
Folded width	mm	585
Folded length	mm	2,310
Stabilizer spread - standard	mm	3,130
Stabilizer spread - extra long	mm	4,000
Standard weight	kg	760
Working pressure	bar	240
Oil flow	L/min	25
Oil tank	L	35

Manufacturer cites EN 12999. Standard weight is the published crane figure; verify installed weight with options, mounting equipment and fluids. Specification values may change without notice.

Source

Hydrolift 675 manufacturer brochure, specification table and technical illustrations. Selected variant: K2.

[Open manufacturer brochure](#)